



ideal Lighting Systems Pvt. Ltd.



PRODUCT SPECIFICATIONS

PRODUCT NAME	LED Weather Proof Bay Light - Gem	Doc No. - ILS/WP/SPC-103/0
PRODUCT CODE	WPHBCHB-140-XX-YY	Date : 01.04.2016

Characteristics

Characteristics	Std. Value
Luminaries wattage	140 Watt
Input Voltage	230 V
Input Frequency	50 H ₂
Input Current	0.78 A
Power Factor	> 0.95
Athd.	CLASS C
Efficiency	93%
Light Spreading Angle	60° / 90° / 120°
Temperature Class	T6
IP Standard	IP65
Total Weight	5.8 Kg
Starting Time	Rapid (0.2 Sec)
Guarantee	5 Years including FLUX/CCT/CRI

Model No	CLU048 - 1818		
LED type / No of LED Lamp	COB/ Single Lamp		
Total Lumen @Tc 25°C	18913	19832	19052
Lumen Efficacy (lm/ Watt)	147 lm/W	154 lm/W	148lm/W
CCT / Color Rendering index	3000K / RA 70	5000K / RA 70	6500K / RA 80


SP Ratio	2-2.25		
MacAdam Ellipse Stage	STEP 3		
LED -Wattage/Current/Voltage	128.8 W / 2315 mA/ 55.7 V @Tc 25°C		
Lamp Life	1,00,000 Hours Min.		
Certifications / Reports	LM70, LM80/Photo Bio. Test / Vibration Test		
Identification Feature	Unique Serial No. Printed on each Lamp		
Actual Test Report of CITIZEN LED Lamp	Actual Operating test Report for 63,000Hrs		

Model No	HBG-160-60
Type of Driver	Constant Current (CC)
Input Voltage Range	90VAC ~ 305 VAC
Frequency Range	47 ~ 63Hz
Inrush current	COLD START 65A
Leakage current	< 0.75 mA / 240VAC
Output Protection	Short Circuit, Over Voltage, Over Current, Over Temperature.
Withstand Voltage	I/P-O/P:3.75K VAC Min.
Surge Protection	L-N :4KV
MTBF /DMTBF	252.3 KHRS Min / 40,000 HRS @ TCASE 70°C
Capacitor Life Cycle	59778 HRS @ 60°C

Optics Type	Glass Lens / Diffuser
MOC of Optics	Borosilicate Glass

Make of Fixture	ILS Pvt.Ltd.
Heat Sink Make	ILS (Own Design)
MOC – Heat Sink	Aluminum Casting - LM 06
Junction Temperature -T _J	86°C
Case Temperature- T _C	65°C


Product Photograph & Thermal Image




Reference Documents

1. Power Analyser Report With Harmonics
2. Electrical Efficiency Reptot
3. Spectroradiometric Test Report
4. TRT Report
5. LM 79 Report
6. IP 65 Test Report
7. LM 70, LM 80 Report


LED Spectrum

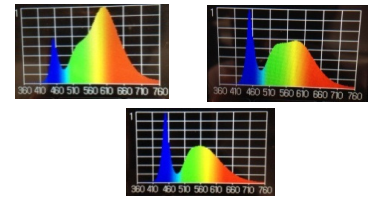

Schematic Drawing



Light Distribution Diagram

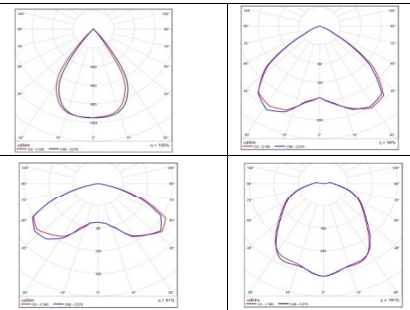

Actual Test result

SERIAL NO.	ILS-60202579					
Mfg Date	16-01-2016.3:09:06 PM					
LED SR. No.	F14530518874					
DRIVER SR. NO.	HB42A79136					
Input	V	A	HZ	W	VA	PF
	240.89	0.610	50	142.53	146.94	0.97
Output	DC.V	DCA	DC.W	EFF	THD	
	56.80	2.262	128.50	90.15	C class	

ILS SPECIALITY : This Fixture is having Lowest Thermal Resistance and single optics. ILS products are having Precise Thermal Management for longer life and Precise light spreading angle for required illumination.

Prepared By	Reviewed By	Approved By