



ideal Lighting Systems Pvt. Ltd.



PRODUCT SPECIFICATIONS

PRODUCT NAME	LED Weather Proof Bay Light - Gem	Doc No. - ILS/WP/SPC-104/0
PRODUCT CODE	WPHBCHB-150-XX-YY	Date : 01.04.2016

Characteristics

Characteristics	Std. Value
Luminaries wattage	150 Watt
Input Voltage	230 V
Input Frequency	50 H _z
Input Current	0.78 A
Power Factor	> 0.95
Athd.	CLASS C
Efficiency	93%
Light Spreading Angle	60° / 90° / 120°
Temperature Class	T6
IP Standard	IP65
Total Weight	5.8 Kg
Starting Time	Rapid (0.2 Sec)
Guarantee	5 Years including FLUX/CCT/CRI

MP JAPAN	Model No	CLU048 - 1818		
	LED type / No of LED Lamp	COB/ Single Lamp		
	Total Lumen @Tc 25°C	19965	20935	20117
	Lumen Efficacy (lm/ Watt)	145 lm/W	152 lm/W	146 lm/W
	CCT / Color Rendering index	3000K / RA 70	5000K / RA 70	6500K / RA 80
	SP Ratio	2-2.25		


MacAdam Ellipse Stage	STEP 3
LED -Wattage/Current/Voltage	138W / 2462 mA/ 56 V @Tc 25°C
Lamp Life	1,00,000 Hours Min.
Certifications / Reports	LM70, LM80/Photo Bio. Test / Vibration Test
Identification Feature	Unique Serial No. Printed on each Lamp
Actual Test Report of CITIZEN LED Lamp	Actual Operating test Report for 63,000Hrs

Model No	HBG-160-60
Type of Driver	Constant Current (CC)
Input Voltage Range	90VAC ~ 305 VAC
Frequency Range	47 ~ 63Hz
Inrush current	COLD START 65A
Leakage current	< 0.75 mA / 240VAC
Output Protection	Short Circuit, Over Voltage, Over Current, Over Temperature.
Withstand Voltage	I/P-O/P:3.75K VAC Min.
Surge Protection	L-N :4KV
MTBF /DMTBF	252.3 KHRS Min / 40,000 HRS @ TCASE 70°C
Capacitor Life Cycle	59778 HRS @ 60°C

Optics Type	Glass Lens / Diffuser
MOC of Optics	Borosilicate Glass

Make of Fixture	ILS Pvt.Ltd.
Heat Sink Make	ILS (Own Design)
MOC – Heat Sink	Aluminum Casting - LM 06
Junction Temperature -T _j	88°C
Case Temperature- T _c	65°C


Product Photograph & Thermal Image




Reference Documents

1. Power Analyser Report With Harmonics
2. Electrical Efficiency Reptot
3. Spectroradiometric Test Report
4. TRT Report
5. LM 79 Report
6. IP 65 Test Report
7. LM 70, LM 80 Report


LED Spectrum

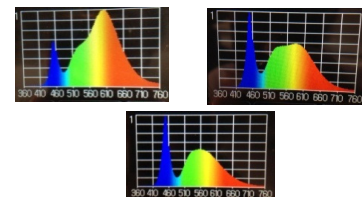

Schematic Drawing



Light Distribution Diagram

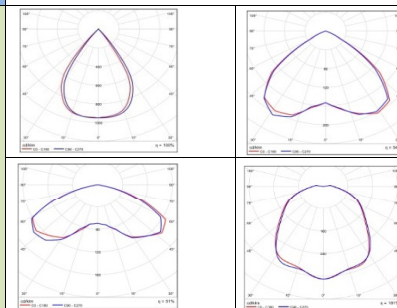

Actual Test result

SERIAL NO.	ILS-60202580					
Mfg Date	16-01-2016.3:11:06 PM					
LED SR. No.	F14530518879					
DRIVER SR. NO.	HB42A79138					
Input	V	A	HZ	W	VA	PF
	240.89	0.643	50	150.25	154.89	0.97
Output	DC.V	DC.A	DC.W	EFF	THD	
	56.80	2.437	138.40	92.12	C class	

ILS SPECIALITY : This Fixture is having Lowest Thermal Resistance and single optics. ILS products are having Precise Thermal Management for longer life and Precise light spreading angle for required illumination.

Prepared By	Reviewed By	Approved By