



ideal Lighting Systems Pvt. Ltd.



PRODUCT SPECIFICATIONS

PRODUCT NAME	LED Weather Proof Bay Light - Platinum	Doc No. - ILS/WP/SPC-126/0
PRODUCT CODE	WPHBEHB-130-XX-YY	Date : 01.04.2016

Characteristics

Characteristics	Std. Value
Luminaries wattage	130 Watt
Input Voltage	230 V
Input Frequency	50 H _z
Input Current	0.78 A
Power Factor	> 0.95
Athd.	CLASS C
Efficiency	93%
Light Spreading Angle	60° / 90° / 120°
Temperature Class	T6
IP Standard	IP65
Total Weight	5.0 Kg
Starting Time	Rapid (0.2 Sec)
Guarantee	5 Years including FLUX/CCT/CRI


LED LAMP MAKE – CITIZEN JAPAN	Model No	CLU048 - 1818		
	LED type / No of LED Lamp	COB/ Single Lamp		
	Total Lumen @Tc 25°C	17750	18613	17886
	Lumen Efficacy (lm/ Watt)	149 lm/W	156 lm/W	150 lm/W
	CCT / Color Rendering index	3000K / RA 70	5000K / RA 70	6500K / RA 80
	SP Ratio	2-2.25		
	MacAdam Ellipse Stage	STEP 3		
	LED -Wattage/Current/Voltage	119W / 2155mA/ 55.2 V @Tc 25°C		
	Lamp Life	1,00,000 Hours Min.		
	Certifications / Reports	LM70, LM80/Photo Bio. Test / Vibration Test		
Identification Feature	Unique Serial No. Printed on each Lamp			
Actual Test Report of CITIZEN LED Lamp	Actual Operating test Report for 63,000Hrs			

Model No	HBG-160-60
Type of Driver	Constant Current (CC)
Input Voltage Range	90VAC ~ 305 VAC
Frequency Range	47 ~ 63Hz
Inrush current	COLD START 65A
Leakage current	< 0.75 mA / 240VAC
Output Protection	Short Circuit, Over Voltage, Over Current, Over Temperature.
Withstand Voltage	I/P-O/P:3.75K VAC Min.
Surge Protection	L-N :4KV
MTBF /DMTBF	252.3 KHRS Min / 40,000 HRS @ TCASE 70°C
Capacitor Life Cycle	59778 HRS @ 60°C

Optics Type	Glass Lens / Diffuser
MOC of Optics	Borosilicate Glass

Make of Fixture	ILS Pvt.Ltd.
Heat Sink Make	ILS (Own Design)
MOC – Heat Sink	Aluminum Extrusion - LM 06
Junction Temperature -T _j	80°C
Case Temperature- T _c	60°C


Product Photograph & Thermal Image

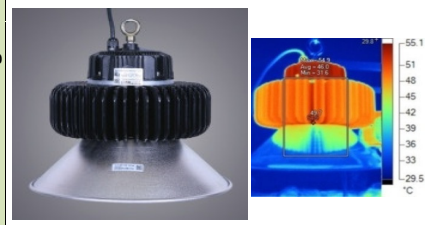


Reference Documents

1. Power Analyser Report With Harmonics
2. Electrical Efficiency Reptot
3. Spectroradiometric Test Report
4. TRT Report
5. LM 79 Report
6. IP 65 Test Report
7. LM 70, LM 80 Report


LED Spectrum

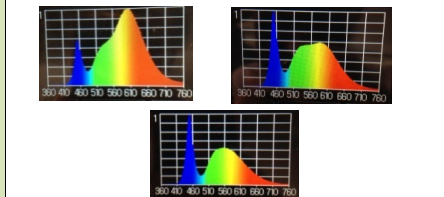

Schematic Drawing

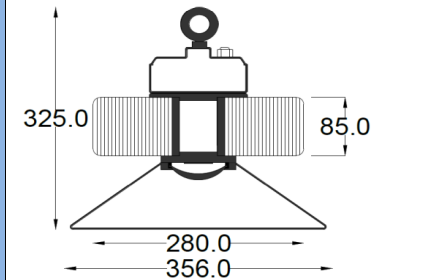

Light Distribution Diagram

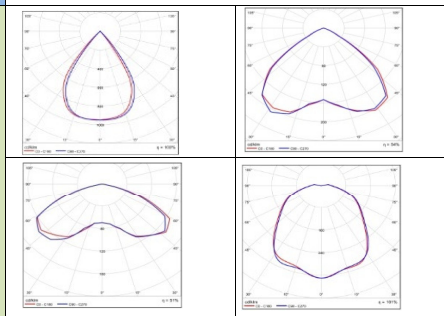

Actual Test result

SERIAL NO.	ILS-60202598					
Mfg Date	16-01-2016.1:35:02 PM					
LED SR. No.	F14530518585					
DRIVER SR. NO.	HB42A79191					
Input	V	A	HZ	W	VA	PF
	240.36	0.570	50	131.52	137.01	0.96
Output	DC.V	DC.A	DC.W	EFF	THD	
	55.90	2.129	119.02	90.49	C class	

ILS SPECIALITY : This Fixture is having Lowest Thermal Resistance and single optics. ILS products are having Precise Thermal Management for longer life and Precise light spreading angle for required illumination.

Prepared By	Reviewed By	Approved By