



ideal Lighting Systems Pvt. Ltd.



PRODUCT SPECIFICATIONS

PRODUCT NAME	LED Weather Proof Bay Light - Platinum	Doc No. - ILS/WP/SPC-130/0
PRODUCT CODE	WPHBEHB-220-XX-YY	Date : 01.04.2016

Characteristics

Luminaries wattage	220 Watt
Input Voltage	230 V
Input Frequency	50 Hz
Input Current	1.3 A
Power Factor	> 0.95
Athd.	CLASS C
Efficiency	93%
Light Spreading Angle	60° / 90° / 120°
Temperature Class	T6
IP Standard	IP65
Total Weight	7.74 Kg
Starting Time	Rapid (0.2 Sec)
Guarantee	5 Years including FLUX/CCT/CRI


LED LAMP MAKE – CITIZEN JAPAN	Model No	CLU058 - 1825		
	LED type / No of LED Lamp	COB/ Single Lamp		
	Total Lumen @Tc 25°C	30223	31689	30450
	Lumen Efficacy (Lm/ Watt)	150 lm/W	157 lm/W	151 lm/W
	CCT / Color Rendering index	3000K / RA 70	5000K / RA 70	6500K / RA 80
	SP Ratio	2-2.25		
	MacAdam Ellipse Stage	STEP 3		
	LED -Wattage/Current/Voltage	202W / 3593 mA/ 56.7 V @Tc 25°C		
	Lamp Life	1,00,000 Hours Min.		
	Certifications / Reports	LM70, LM80/Photo Bio. Test / Vibration Test		
Identification Feature	Unique Serial No. Printed on each Lamp			
Actual Test Report of CITIZEN LED Lamp	Actual Operating test Report for 63,000Hrs			

Model No	HBG-240-60
Type of Driver	Constant Current (CC)
Input Voltage Range	90VAC ~ 305 VAC
Frequency Range	47 ~ 63Hz
Inrush current	COLD START 75A
Leakage current	< 0.75 mA / 240VAC
Output Protection	Short Circuit, Over Voltage, Over Current, Over Temperature.
Withstand Voltage	I/P-O/P:3.75K VAC Min.
Surge Protection	L-N :4KV
MTBF /DMTBF	190 KHRs Min / 50,000 HRS @ TCASE 70°C
Capacitor Life Cycle	48791.3 HRS @ 60°C

Optics Type	Glass Lens / Diffuser
MOC of Optics	Borosilicate Glass

Make of Fixture	ILS Pvt.Ltd.
Heat Sink Make	ILS (Own Design)
MOC – Heat Sink	Aluminum Extrusion - LM 06
Junction Temperature -T _j	101°C
Case Temperature- T _c	70°C


Product Photograph & Thermal Image




Reference Documents

1. Power Analyser Report With Harmonics
2. Electrical Efficiency Reptot
3. Spectroradiometric Test Report
4. TRT Report
5. LM 79 Report
6. IP 65 Test Report
7. LM 70, LM 80 Report


LED Spectrum

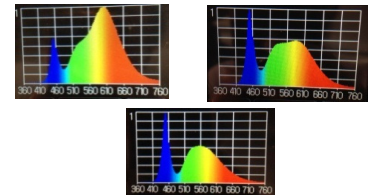

Schematic Drawing



Light Distribution Diagram

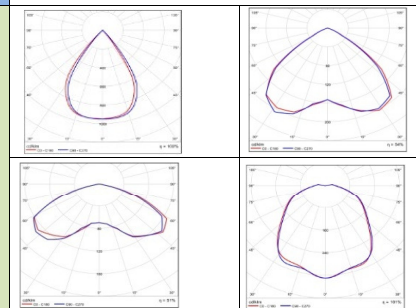

Actual Test result

SERIAL NO.	ILS-60202584					
Mfg Date	16-01-2016.3:58:06 PM					
LED SR. No.	F14530518878					
DRIVER SR. NO.	HB42A79141					
Input	V	A	Hz	W	VA	PF
	240.65	0.945	50	220.59	227.41	0.97
Output	DC.V	DC.A	DC.W	EFF	THD	
	55.87	3.631	202.89	91.98	C class	

ILS SPECIALITY : This Fixture is having Lowest Thermal Resistance and single optics. ILS products are having Precise Thermal Management for longer life and Precise light spreading angle for required illumination.

Prepared By	Reviewed By	Approved By